

PCS and WLAN Omni Antennas

ANCC-15x Series

V4.00

Features

- Light Weight - Slim Profile
- Patented Printed Circuit Technology
- Watertight Ultrasonic and O-Ring Sealed
- Groundplane Independent
- Stainless Steel Hardware
- Multiple pigtail lengths, radome colors and connector options available

Description

M/A-COM's Omni antennas are vertically polarized collinear arrays utilizing a patented printed circuit technology for the radiating elements. These rugged antennas are housed in UV stable ultrasonically bonded polycarbonate radomes. Installation is easy due to the small footprint, mounting system, and our convenient pigtail connection. Our Omni antennas are groundplane independent and can be mounted in any direction. Mounting bracket included.



Specifications

Part No: ANCC-	151A	152A	153A	154A	155A	156A
Frequency (MHz)	1850-1990	1850-1990	1850-1990	2400-2500	2400-2500	2400-2500
Peak Gain (dBi)	4.2 Typical	5.6 Typical	6.7 Typical	4.5 Typical	6.0 Typical	7.0 Typical
Beamwidth - 3dB	40°	27°	22°	40°	27°	22°
Polarization - Linear	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Nominal Impedance	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm
VSWR	2.0:1 Max	2.0:1 Max	2.0:1 Max	2.0:1 Max	2.0:1 Max	2.0:1 Max
RF Power - Average	50 W	50 W	50 W	50 W	50 W	50 W
Weight	3.9 oz	4.3 oz.	4.7 oz.	3.5 oz	3.9 oz	4.3 oz
Length ± 0.125 in.	11.6	15.35	19.35	10.1	12.6	15.6
Diameter ± 0.015 in.	0.75	0.75	0.75	0.75	0.75	0.75
Temperature	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Pigtail (RG - 58/U)	12" N-Male	12" N-Male	12" N-Male	12" N-Male	12" N-Male	12" N-Male
Color	Natural	Natural	Natural	Natural	Natural	Natural

How to Order: Select the appropriate option from the table above, and add "-S-12-NM" to the part number. For example, to order a 6.7 dBi antenna for use at 1920 MHz, the part number will be ANCC-153A-S-12-NM.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +85 2 2111 8088 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +85 2 2111 8087 Fax +44 (1344) 300 020


Mounting Instructions:

The antenna should be mounted free and clear of all surrounding structures. Mount the antenna and tighten all hardware.


Performance Note:

The performance of the antenna is established by the local electrical environment. The performance listed in this datasheet was measured in free space without a groundplane or reflective material present. The suitability of this type of antenna should be established through testing and actual configuration of use.


ANCC-153A

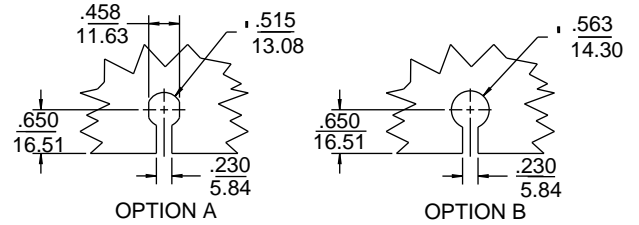

Required Mounting
(without bracket)
MIN MOUNTING PANE THICKNESS .06
MAX MOUNTING THICKNESS .33

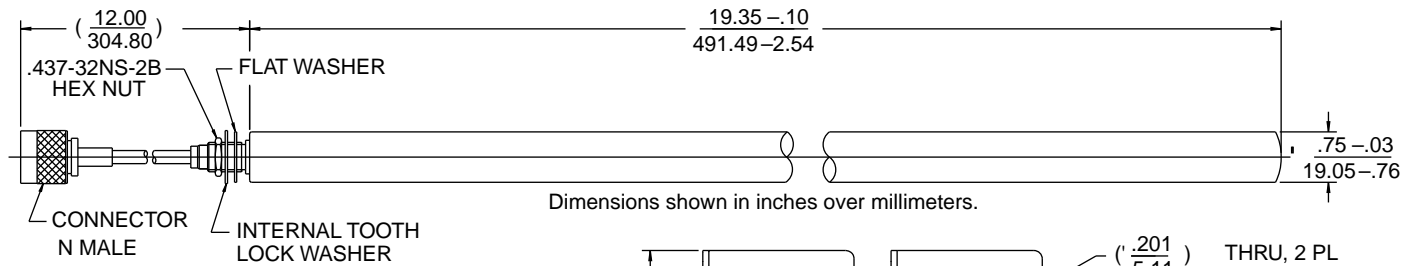


Dimensions shown in inches over millimeters.

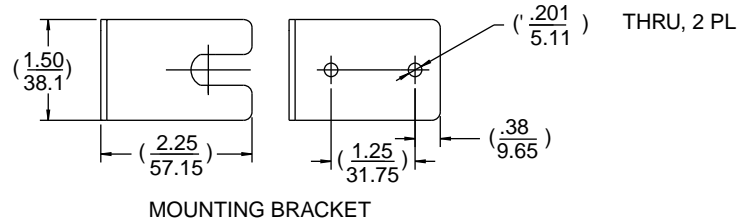


Sample Elevation Plane Radiation Patterns

ANCC-151A at 1920 MHz

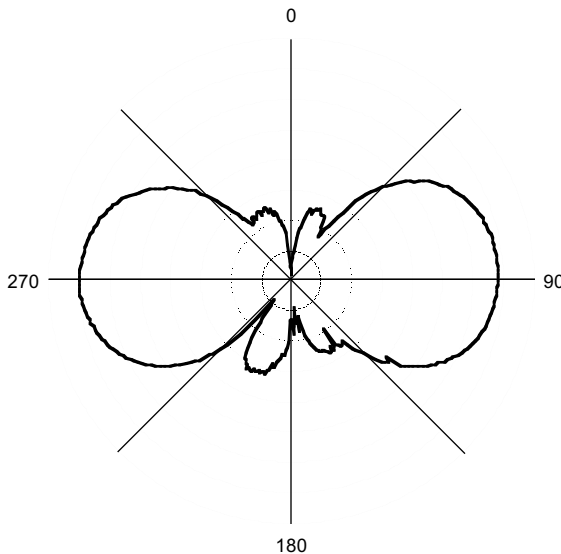

ANCC-153A at 1920 MHz

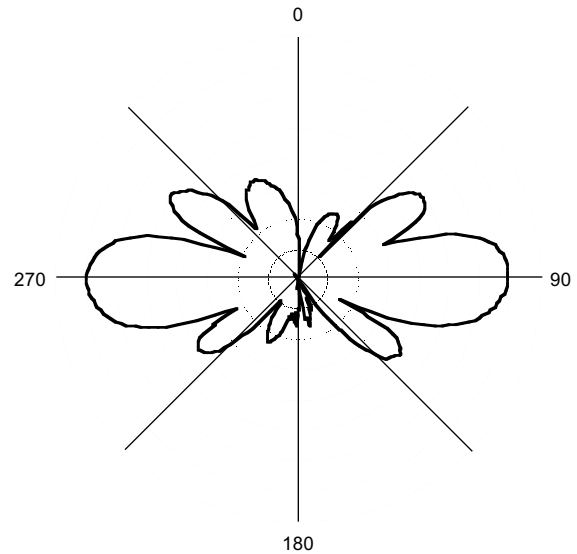

Azimuth Plane is omnidirectional within ± 1.5 dB.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +85 2 2111 8088
Fax +85 2 2111 8087

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.