



RooTenna® 2 Panel Antenna 4940 to 5850 MHz Operation

Features

- RooTenna®, the antenna with a pouch!
- Low Profile 24 dBi Antenna Gain
- Includes Ethernet feedthru with RJ45 Passthru and customer mounting plate
- Low Heat Absorption White UV Protected Housing
- Vertical or Horizontal Polarization, Beamwidth 9 deg
- Available with RPSMA, RPTNC, MC Card, MMCX, RPMMCX and U.FL antenna connector



R2T58-24

Applications

- Integrated Radio/ Antenna Units
- WISP CPE Equipment
- Amplified Antennas
- 802.11a Applications

Description

The RooTenna® panel antenna offered by Pacific Wireless is designed to allow integration of the customers' radio equipment inside the weatherproof compartment. The radio compartment is big enough to house transceivers, amplifiers, and other electronic equipment. The unit is complete with a removable customer mounting plate for mounting of customer electronics and an RJ45 passthru Ethernet feedthru.. The housing is UV stabilized ABS plastic. The backplate is alodine coated aluminum with stainless steel fasteners. All bracket fasteners are stainless steel for corrosion protection.


Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	4940		5850	MHz
VSWR (4940-4990MHz <2.0)		1.5:1		
Impedance		50		OHM
Input Power			20	W
Operating Temperature	-45		+70	Deg C
Gain		24		dBi
3db Beam Angle (E-Plane)		9		Deg
3dB Beam Angle (H-Plane)		9		Deg
Front to Back	30			dB
Weight		6 (2.7)		Lb (kg)
Compartment Dim(L x W x H)	16.25" x 14.75" x 1" (413 x 375 x 25)			Inches (mm)
Outside Dim (L x W x H)	18.5" x 16.8" x 2.5" (470 x 427 x 64)			Inches (mm)




Wind Loading	100MPH	125MPH	100MPH with ½" Radial Ice
Force (Lbs)	77.8	121	83

Antenna Patterns

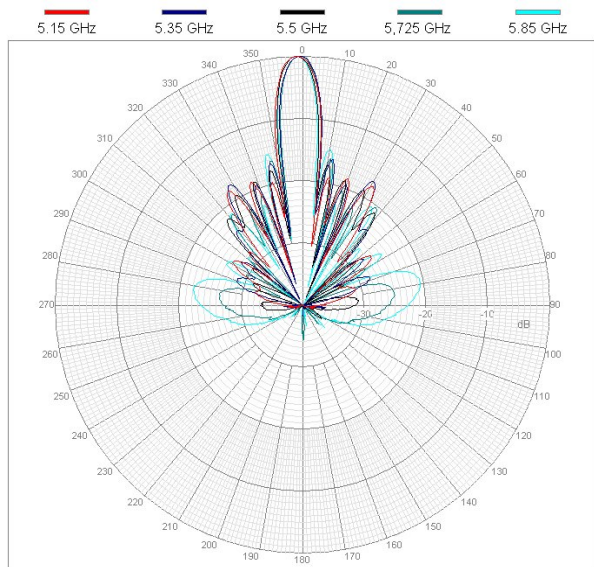

R2T58-24 E-Plane

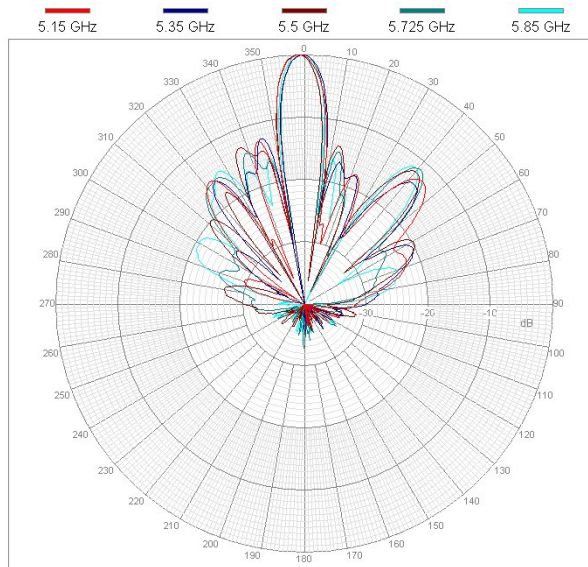

R2T58-24 H-Plane



RJ45 passthru Ethernet Feedthru

Notes:

- All shipments F.O.B. Bluffdale, UT 84065
- All antennas carry a 2 Year Warranty

System Ordering:

R2T58 -24-

Connector Type

- RSMA = Reverse Polarity SMA Male
- RTNC = Reverse Polarity TNC Male
- MC = MC Card Plug Connector
- MMCX = MMCX Plug Connector
- RMMCX = Reverse Polarity MMCX Connector
- UFL = U.FL (MHF) Miniature Connector



For further information contact:



Pacific Wireless
 14575 South Centerpoint Way
 Bluffdale, UT 84065
 TEL (801) 572-3024
 FAX (801) 572-3025
 www.pacwireless.com