



SED-2610



- MPEG-4 ASP compression
- CIF up to Full D1 resolution at 30/25 FPS
- Multi-stream with variable frame rate in the same compression
- Two way audio supported (per channel)
- Hardware motion detection, Digital Input / Output (per channel)
- Serial ports for each channel

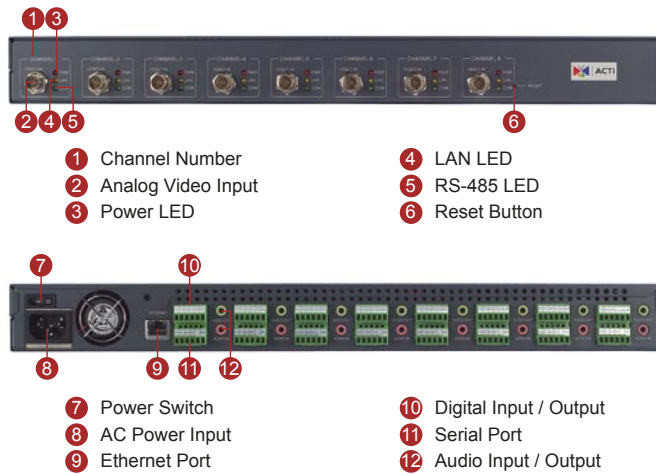

DIMENSION DIAGRAM

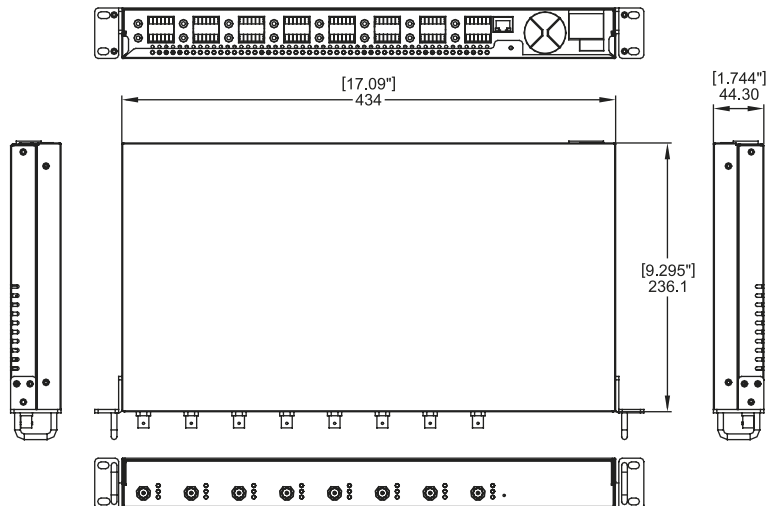

Unit: mm [inch]

**PRODUCT SPECIFICATION****Video Compression**

Compression	MPEG-4 ASP Compliant
Picture Resolution	Full D1 (720 x 480 in NTSC, 720 x 576 in PAL); CIF (352 x 240 in NTSC, 352 x 288 in PAL); QCIF (160 x 112 in NTSC, 176 x 144 in PAL) (per channel)
Bit Rate	28K ~ 3M bps (per channel)
Image Frame Rate	30fps at full D1 resolution (NTSC) 25fps at full D1 resolution (PAL) (per channel)
Multi-stream	Up to 4 configurable frame rate/bit rate streams for preview and recording (per channel)

Function

Motion Detection	Yes
------------------	-----

Video Input

Composite Input	8, CVBS, 1.0Vp-p with 75 Ω loading, BNC connector
-----------------	------------------------------------------------------

Video Output

Composite Output	N/A
------------------	-----

Audio Input

Compression	8kHz, Mono, PCM
Audio Line Input	8, Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Phone Jack (per channel)

Audio Output

Compression	8kHz, Mono, PCM
Audio Line Output	8, Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Phone Jack (per channel)

Alarm

Digital Input	2, TTL, terminal block (per channel)
Digital Output	2, TTL, terminal block (per channel)

Remote Control

Serial Port	RS-485 : half duplex, terminal block RS-422 : full duplex, terminal block RS-232** : full duplex, terminal block (per channel)
-------------	-----------------------------------------------------------------------------------------------------------------------------------------

External I/O

Reset Button	Factory default
LED	System status (per channel)

Network

Ethernet Port	Ethernet (10/100Base-T), RJ-45 connector
Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP

Software

Web Browser	Microsoft Internet Explorer 6.0 or above
SDK	ACTi SDK-10000
PTZ Protocol*	Pelco-D, Pelco-P V1 and V2, Dynacolor, Sony VISCA, American Dynamics
Security	Password protection: configured by the administrator

Operating

Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
-------------	-------------------------------

Power

Power Requirement	AC 100 ~ 240V 50 / 60 Hz
Power Consumption	60 W

Physical

Dimensions (WxHxD)	434 mm x 44.3 mm x 236 mm (17.09" x 1.744" x 9.295")
Weight	4.2 Kg (9.26 lb)

Approvals

Certificate	CE, FCC
-------------	---------

* These PTZ protocols are supported in ACTi NVR and Streaming Explorer.

** Adjust by inside jumper.