

High Rate Valve Regulated SLA Batteries

Features

- Sealed and Maintenance Free
- Safety Valve for Ultimate Safety; Prevents Overpressure
- Exceptional Deep Discharge Recovery Performance
- Low Self Discharge Characteristics
- Highly Resistant to Vibration and Shock



Applications

- Remote Equipment Power
- Surveillance Cameras
- Wireless Base Stations
- Medical Equipment
- Remote Sensors
- Backup Power Systems




Description


The TPBAT series of high rate valve regulated sealed lead acid (VRLA) batteries have been developed for long term operation in harsh environments. The small TPBAT12-9 battery uses absorbent glass mat (AGM) technology which provides for unsurpassed reliability over wide temperature ranges. The TPBAT12-100 battery uses gelled electrolyte technology which provides for the longest battery life available for applications like solar powered systems requiring numerous deep discharges. The batteries can be installed in any position without affecting their performance or reliability.

The combination of advanced electrode and electrolyte formulations provide higher power output than normal batteries of the same physical size. The TPBAT12-9 has F2 type .25" spade connectors. The TPBAT12-100 has 3/8" Stainless Steel Stud Terminal style connectors.

TPBAT12-9 GRAPHS

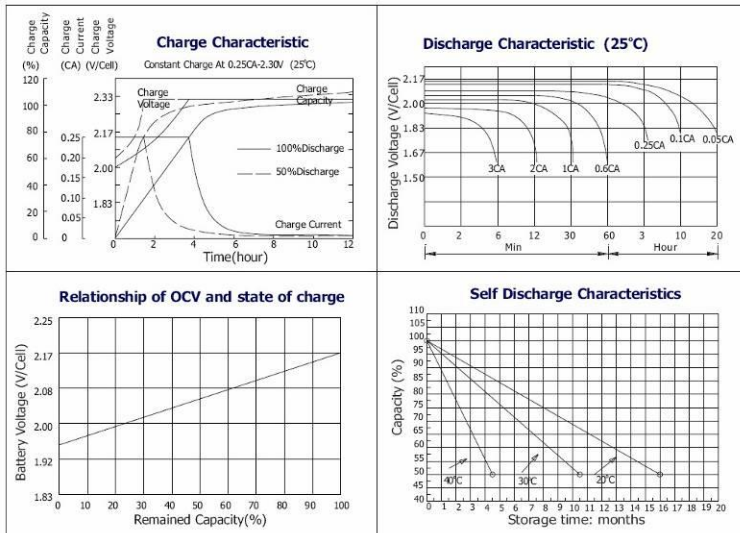

TPBAT12-100 GRAPHS

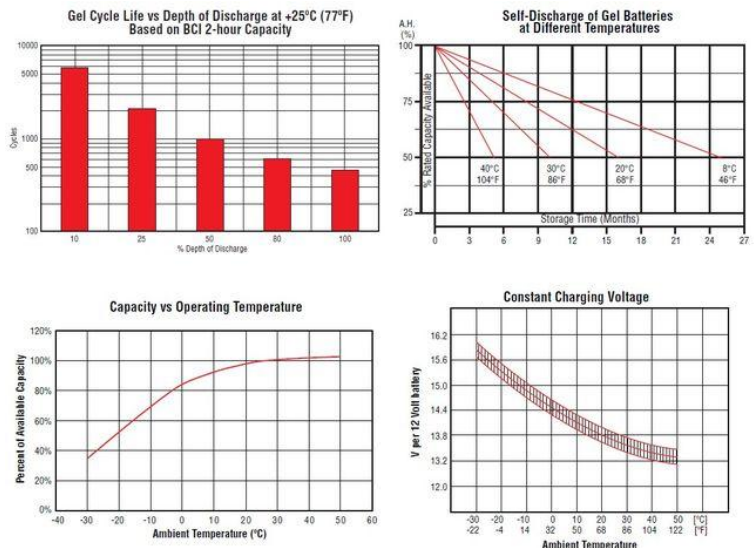


Specifications


	TPBAT12-9	TPBAT12-100
Voltage	12V	12V
Capacity (amp hours; 20hr)	9	98
Float Life	5 Years	5 Years
Type / Technology	Valve Regulated Sealed Lead Acid / Absorbent Glass Mat (AGM)	Valve Regulated Sealed Lead Acid / Gelled Electrolyte (GEL)
Capacity vs Temperature	40°C=102%; 0°C=85%, -15°C=65%	50°C=102%; 0°C=85%, -30°C=40%
Self Discharge (25°C)	<3% per month	<2% per month
Charge Voltage (-30mV / °C)	14.4 to 15V ; Max Current 2.7A	14.4 to 14.7V ; Max Current 25A
Float Voltage (-20mV / °C)	13.6 to 13.8V	13.5 to 13.8V
Operating Temperature	-40C (-40F) to +60C (140F)	-60C (-76F) to 60C (140F)
Housing	ABS (UL94HB)	Polypropylene
Dimensions	151 x 65 x 95mm (5.9 x 2.6 x 3.7")	329 x 171 x 237mm (13 x 7 x 9.5")
Weight	2.5kg (5.5lb)	31.8kg (70lb)

Notes:

- All shipments F.O.B. Draper, UT 84020
- Tycon Power Systems Batteries carry a 2 year limited warranty



TPBAT12-9
0.25" Spade Terminal



TPBAT12-100
Stainless Steel Stud Terminal
3/8" x 0.6"

System Ordering:

TPBAT12-9 12V 9Ah Valve Regulated Sealed Lead Acid AGM Battery
TPBAT12-100 12V 98Ah Valve Regulated Sealed Lead Acid GEL Battery

For further information contact:

Tyconpower.com



693 Draper Heights Way Ste 102
 Draper, UT 84020
 PH: 801-432-0003
 FAX: 801-618-4220